
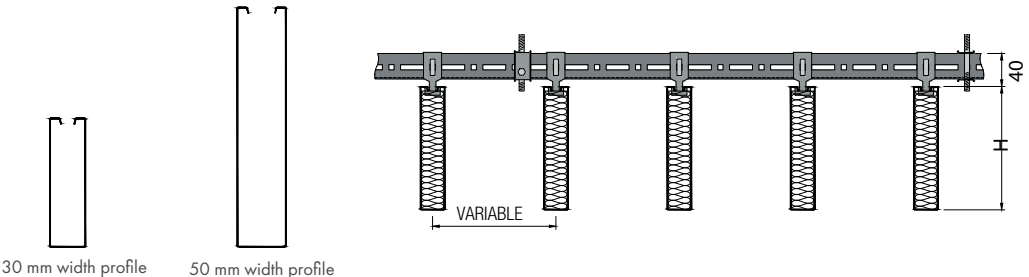



















## ARMSTRONG METALWORKS™ V-P500 ACOUSTICAL BAFFLE

- Fast and simple installation with U-Profile or standard hanging kits
- Standard panels are micro perforated with soft fiber infill to optimize acoustical performance
- Available in large profile up to 450mm (H) for a dramatic visual
- Easy to install if there is a suspended ceiling between the canopy and the soffit
- Easy integration of lighting, air conditioning or other equipment into the ceiling space
- Available in modular configuration as V-K500

# ARMSTRONG METALWORKS™ V-P500 ACOUSTICAL BAFFLE

Panel Options	V-P500: Large Modular Acoustical Baffle	
 <b>Edge details</b>	 <p>30 mm width profile    50 mm width profile</p>	
 <b>Material</b>	Galvanized Steel	
 <b>Patterns</b>	   <p>Non Perforated (M1)    Micro Perforated (M2) 1.5mm Ø 19% Open Area</p> <p>Perforated V-P500 are infilled with glass wool acoustical pad and with black fleece on both side</p>	
 <b>Dimensions (mm)</b>	30 (W) x 100 / 150 / 200 / 300 (H) x 3000 (L) 50 (W) x 250 / 450 (H) x 3000 (L)	
 <b>Suspension System</b>	U-Profile System with V-P500 Baffle Hanger OR Individual Hanger	
 <b>Weight</b>	≈ 3.2 kg to 8.0 kg / lm	
 <b>Colour</b>	Polyester Powder Coated – Global White  Wood Effects Available by Request	
 <b>Sound absorption</b>	NRC 0.60 (In accordance to planar Installation 300 (H) at 300mm over center.)	
 <b>Fire reaction</b>	CLASS 0/1 based on BS 476 Part 6 & 7	
 <b>Handling</b>	Fully Demountable. Inherent void between beams allows plenum access.	
<b>Durability</b>		
<b>Cleanability</b>	  	

All sizes are nominal. Product availability may vary.

## Contact

For further details, please contact your local representative or email [asia.support@knaufarmstrong.com](mailto:asia.support@knaufarmstrong.com)